

Panasonic

ideas for life

P2HD

AG-HPX255

Memory Card Camera Recorder "P2 handheld"

Scheduled for release in July 2012

Preliminary



AG-EC4G Extension Control Unit (option)

New Remote Terminal for Studio Integration. A High-Performance Handheld Model Approaching Shoulder-Type system capability.

The AG-HPX255 Memory Card Camera Recorder is compatible with the optional AG-EC4G Extension Control Unit and features all advanced functions of the current AG-HPX250.* This combines with Genlock input, TC input and output, and HD SDI output to allow multi-camera operation that includes camera control.

Featuring a versatile 22x zoom lens and high-sensitivity/low noise 1/3-type 2.2 megapixel U.L.T. (Ultra Luminance Technology) 3MOS image sensor, it uses an AVC-Intra codec to enable high-quality recording of Full-HD (1920 x 1080), 10 bit, 4:2:2 full sample images. Together with features such as a variable frame rate (VFR) for slow-motion and quick-motion images, this allows the new AG-HPX255 to offer a level of performance that approaches shoulder-type P2 models, while providing easy operation for image production and broadcasting use.

*The AJ-RC10 Camera Remote Control Unit cannot be used with the AG-HPX255. Camera studio systems using the AG-BS300 Base Station are also not supported.

AVC INTRA **DVC PRO HD** **DVC PRO 50** **DVC PRO LX**

AG-HPX255 High-Performance "P2 handheld"

Broadcasting Specs for Camera Remote Systems

- Remote terminal for the optional AG-EC4G Extension Control Unit.*

Image quality can be adjusted and image acquisition can be controlled while viewing the monitor at a remote location.

This handheld unit also supports studio integration.

- Genlock input and TC input/output enables multi-camera synchro shooting.
- Equipped with HD SDI output and HDMI output.

* The AJ-RC10 Camera Remote Control Unit cannot be used with the AG-HPX255. Camera studio systems using the AG-BS300 Base Station are also not supported.

High Zooming Power, Sensitivity and Image Quality Approaching Many Shoulder-Type Models

- 22x (f = 28 mm to 616 mm, 35 mm equivalent) zoom lens with three manual operation rings – zoom, focus and iris.
- Featuring a new U.L.T. (Ultra Luminance Technology) image sensor (1/3-type 2.2 megapixel 3MOS sensor).
- DRS (Dynamic Range Stretch) provides a wider dynamic range.
- Recording format: AVC-Intra100, AVC-Intra50 and DVCPRO HD/DVCPRO 50/DVCPRO/DV.
- HD multi-format recording: 1080/24p, 1080/25p, 1080/30p, 1080/50i, 1080/60i, 720/24p, 720/25p, 720/30p, 720/50p, 720/60p and SD (480/24p, 480/30p, 480/60i, 576/25p, 576/50i).

* 60i/p, 24p and 30p, are actually recorded in 59.94 Hz, 23.98 Hz and 29.97 Hz, respectively.

- VFR (variable frame rate): Enables film-camera-like speed effects.
- Seven-mode selectable gamma, such as cine-like mode, for rich gradation.
- 4-position (OFF, 1/4 ND, 1/16 ND, 1/64 ND) optical neutral density filter wheel.


Advanced Focusing Functions and New Proxy Recorder Support

- A host of focusing functions, including Focus in Red and Expand.
- Support for the optional new proxy recorder (FOCUS FS-P250/coming soon) for proxy recording*1 and wireless connection*2.
- Scene file, user buttons, and waveform/vectorscope display functions.
- Two P2 card slots enable consecutive recording and hot-swapping.
- The one-clip recording function records multiple cuts in a single clip.
- Pre-rec, loop rec, one-shot rec and interval rec capability.
- Text memos and shot markers can be added.
- 48 kHz/16 bit, 4 channel digital audio recording. XLR 2 channel audio input terminals supporting 48 V phantom power supply.
- USB 2.0 (Host/Device) and IEEE 1394a (AVC)*3 interface.

*1: When using the optional FOCUS FS-P250 portable proxy recorder (coming soon).

*2: Optional FOCUS FS-P250 (coming soon) and optional AJ-WM30 are required.

*3: IEEE 1394a input/output are not available for AVC-Intra codec files.

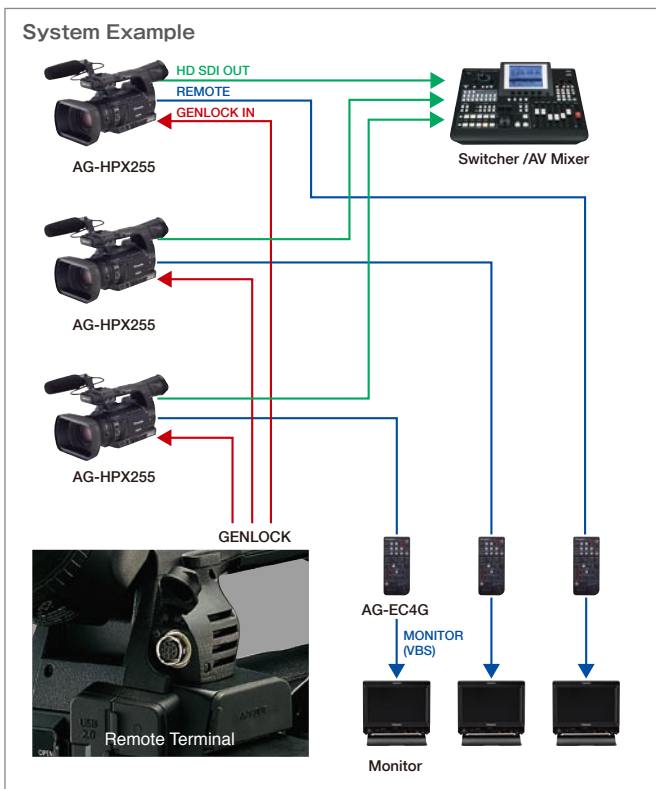

Panasonic

(Countries and Regions)

Panasonic Corporation
Business Solutions Business Group
2-15 Matsuba-cho, Kadoma, Osaka 571-8503
Japan
<http://pro-av.panasonic.net/>

Argentina	+54 1 308 1610
Australia	+61 (0) 2 9491 7400
Bahrain	+973 252292
Belgium	+32 (0) 2 481 04 57
Brazil	+55 11 3889 4035
Canada	+1 905 624 5010
China	+86 10 6515 8828
Hong Kong	+852 2313 0888
Czech Republic	+420 236 032 552/511
Denmark	+45 43 20 08 57
Egypt	+20 2 23938151
Finland, Latvia, Lithuania, Estonia	+358 (9) 521 52 53
France	+33 (0) 1 55 93 66 67
Germany, Austria, Switzerland	+49 (0) 611 235 459
Greece	+30 210 96 92 300
Hungary	+36 (1) 382 60 60
India	+91 120 247 1000
Indonesia	+62 21 385 9449
Iran (Vida)	+98 21 2271463
(Panasonic Office)	+98 2188791102
Italy	+39 02 6788 367
Jordan	+962 6 5859801
Kazakhstan	+7 727 298 0891
Korea	+82 2 2106 6641

Kuwait	+96 522431385
Lebanon	+96 11665557
Malaysia	+60 3 7809 7888
Mexico	+52 55 5488 1000
Netherlands	+31 73 64 02 577
New Zealand	+64 9 272 0100
Norway	+47 67 91 78 00
Pakistan	+92 5370320 (SNT)
Palestine	+972 2 2988750
Panama	+507 229 2955
Peru	+51 1 614 0000
Philippines	+63 2 633 6163
Poland	+48 (22) 338 1100
Portugal	+351 21 425 77 04
Puerto Rico	+1 787 750 4300
Romania	+40 21 211 4855
Russia & CIS	+7 495 6654205
Saudi Arabia	+96 626444072
Singapore	+65 6270 0110
Slovak Republic	+421 (0) 2 52 92 14 23
Slovenia, Albania, Bulgaria, Serbia, Croatia, Bosnia, Macedonia, Montenegro	+36 (1) 382 60 60
South Africa	+27 11 3131622
Spain	+34 (93) 425 93 00
Sweden	+46 (8) 680 26 41
Syria	+963 11 2318422/4

Taiwan	+886 2 2227 6214
Thailand	+66 2 731 8888
Turkey	+90 216 578 3700
U.A.E. (for All Middle East)	+971 4 8862142
Ukraine	+380 44 4903437
U.K.	+44(0)1344 70 69 13
U.S.A.	+1 877 803 8492
Vietnam	+848 38370280



JQA-0443



Factories of Business Solutions Business Group have received ISO14001:2004-the Environmental Management System certification. (Except for 3rd party's peripherals.)