



> **SHORT  
DISTANCE**


> **BIG PICTURE**

> **PRESENT  
WITH ESP**

- ESP (Extreme Short throw Projector)
- Brilliant Color™
- NCE 4™-Chip



Display	0.55" DMD™ Chip
Resolution	XGA 1,024 x 768
Brightness	2,300 ANSI-lumens
Colour reproduction	16.7 mio. colours
Contrast	2,000:1
Projection format	4:3 switchable to 16:9, 16:10 (compr.)
Lamp	275 W (TLPLW15LAMP)
Max. lamp life	up to max. 2,000 hours/ up to max. 3,000 hours in ECO mode
Lens	F = 2.6 / f = 8.37, manual focus
Zoom	-
Frequency (hor./vert.)	15 - 120 kHz / 50 - 150 Hz
Projection	front, rear and ceiling
Digital keystone correction	full auto vertical +/- 18°
Picture size (diagonal)	0.89 - 2.54 m
Projection offset	130 %
Input signals	NTSC/PAL/SECAM, 480i, 480p, 576i, 576p, 720p, 1,080i, VGA, SVGA, XGA, SXGA, WXGA & UXGA (compr.)
Inputs	2 x RGB (D-sub 15), S-video, composite video (RCA), audio (stereo mini jack), video/S-video, audio (2 x RCA L/R), component (Y/PB/PR) via D-sub 15
Outputs	RGB (D-sub 15), audio (stereo mini jack)
Serial interface	RS-232C (D-sub 9pin)
Power supply	AC 100 - 240 V, 50/60 Hz
Loudspeaker	1 W mono
Dimensions (W x H x D)	337 x 118 x 265 mm
Weight	4.2 kg
Operation noise	ECO Mode 28 dB / normal 33 dB
Specials	Password, panel lock, digital zoom, user logo capture, DDC compatible, BrilliantColor™
Accessories	remote control with batteries, owners manual (CD ROM), quick reference, RGB and power-cable
Options	ceiling mount, spare lamp, camera c001
Menu guidance	22 languages: English, French, German, Italian, Spanish, Portuguese, Russian, Swedish, Turkish, Polish, Japanese, Chinese (simple/traditional), Korean, Indonesian, Danish, Czech, Hungarian, Dutch, Finnish, Norwegian, Greek, Rumanian

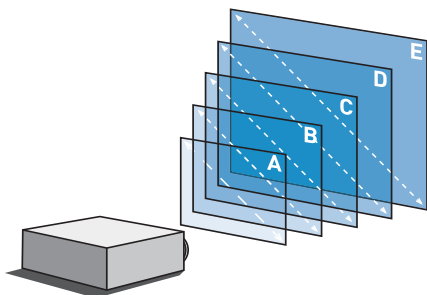

Picture size	Projection distance
A 0.89 m	0.50 m
B 1.20 m	0.69 m
C 1.50 m	0.87 m
D 2.00 m	1.16 m
E 2.54 m	1.50 m