TOSHIBA

The right impression - t100 tw100

2,600 ANSI-lumens
Contrast 2,000:1
XGA Resolution
tw100: Wireless

- **Password protection, panel lock and userlogo capture**
- **2 RGB Inputs, 1 RGB and 1 Audio Output**
- **1.6 x zoom with 30 degree vertical keystone correction**
- **tw100: USB reader, wireless LAN, power zoom, auto focus**

* NCE2 is an improved colour optimization by Toshiba

DLP™, the DLP™-Badge are registered trademarks of Texas Instruments.

TOSHIBA

t100 tw100

Display 0.55" DMD Chip™*
Resolution XGA 1,024 x 768
Brightness 2,600 ANSI-lumens
Colour reproduction 16.7 million colours
Contrast 2,000:1
Projection format 4:3 switchable to 16:9
Lamp 275 W (TLPLW10LAMP)
Max. lamp life up to max. 2,000 hours/
up to max. 3,000 hours in ECO mode
Lens F = 2.07 - 2.64 / f = 20.5 - 32.8 mm wide angle
t100: manual zoom and focus
tw100: power zoom, auto focus
Zoom ratio 1.6 x optical zoom
Throw ratio 1.8 - 2.8 : 1
Frequencies (hor./vert.) 15 - 120 kHz / 50 - 150 Hz
Projection front, rear and ceiling
Digital keystone correction vertical +/- 30°
Picture size (diagonal) 0.76 m - 7.62 m
Projection distance 1.07 m - 11.09 m
Input signal NTSC / PAL / SECAM 480i, 480p, 576i,
576p, 720p, 1,080i, VGA / SVGA / XGA, SXGA + UXGA (compr.)
Inputs 2 x RGB (D-sub 15), S-video, composite video (RCA),
3 x audio (2 x RCA, 1 x stereo mini jack),
tw100: USB Typ A
Outputs monitor (D-sub 15), audio (stereo mini jack)
Serial Interface RS-232C (mini DIN 8pin)
Power supply AC 100 - 240V, 50/60 Hz
Loudspeaker 1 W (mono)
Dimensions (W x H x D) 300 x 99 x 218 mm
Weight t100: 2,9 kg, tw100: 3,0 kg
Features user logo, password protection, key lock, NCE 2, digital
resize- and black board-function, immediate shut down,
ECO mode, auto V keystone correction, DDC compatible (blue terminal)
tw100: auto focus, power zoom, USB reader (type A), wireless LAN
Accesories remote control with laserpointer and batteries,
owners manual (CD ROM), audio-, S-video-, RGB- and
power cable, softcase,
tw100: WLAN card and software
Options spare lamp, camera c001, ceiling mount
Wireless communication (tw100) WLAN capable with WLAN card,
wireless LAN (IEEE802.11b/g), 64/128 bit wep encryption

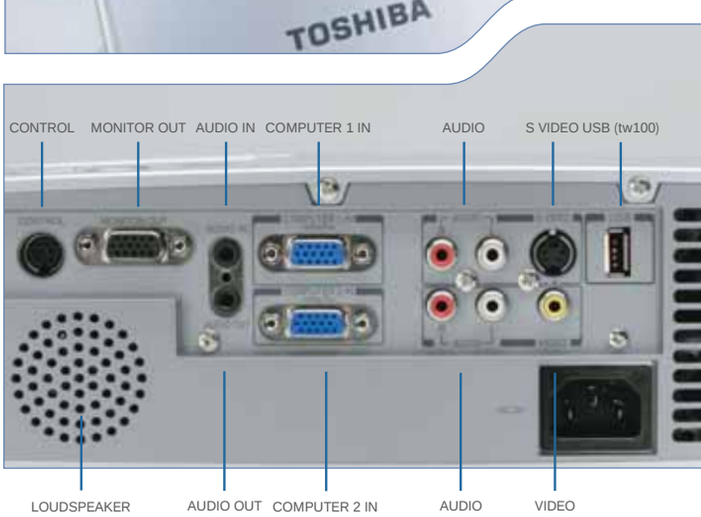

picture size (diagonal in m)	projection distance a (m)	
	min lenght (zooming max)	max lenght (zooming min)
0.76	1.07	1.75
1.02	1.45	2.35
1.52	2.19	3.55
2.03	2.93	4.74
2.54	3.67	5.93
3.81	5.53	8.92
5.08	7.38	-
6.35	9.24	-
7.62	11.09	-

Toshiba Information Systems (uk) Ltd
Projection & Display Technology
Toshiba Court · Weybridge Business Park
Addlestone Road · Weybridge
Surrey KT15 2UL

March 2006 • E & OE - Product design and specification subject to change or modification without notice.

PVP 000 46