

A perfect integration of design and technology.



- 2,200 ANSI-lumens
- Contrast 2,000:1
- BrilliantColor™




DLP™ and the DLP logo are registered trademarks of Texas Instruments and BrilliantColor™ is a trademark of Texas Instruments

| xp1



| | |
|-----------------------------|--|
| Display | 0.55" DMD™ Chip |
| Resolution | XGA 1.024 x 768 |
| Brightness | 2,200 ANSI-lumens |
| Colour reproduction | 16.7 million colours |
| Contrast | 2,000:1 |
| Projection format | 4 : 3 switchable to 16 : 9 |
| Lamp | 200 W (TLPLV10LAMP) |
| Max. lamp life | up to max. 3,000 hours/ up to max. 4,000 hours in ECO mode |
| Lens | F = 2.4 - 2.6 / f = 21.8 - 23.8 mm, manual focus and zoom |
| Zoom | 1.1 x |
| Frequency (hor./vert.) | 31 - 69 kHz/56 - 85 Hz |
| Projection | front, rear and ceiling |
| Digital keystone correction | manual vertical |
| Picture size (diagonal) | 0.6 - 7.7 m |
| Projectionoffset | 130 % |
| Input signals | NTSC / PAL / SECAM, 480i, 480p, 576i, 576p, 720p, 1,080i, VGA, SVGA, SXGA (compr.) |
| Inputs | 1 x RGB (D-sub 15), 1 x S-video, compo- site video (RCA), 1 x RGB audio stereo mini jack |
| Outputs | RGB, audio (stereo mini jack) |

| | |
|------------------------|---|
| Serial interface | RS-232C (D-sub 9pin) |
| Power supply | AC 100 - 240 V, 50 / 60 Hz |
| Loudspeaker | 2 W Mono |
| Dimensions (W x H x D) | 270 x 189 x 87 mm |
| Weight | 2.2 kg |
| Operation noise | ECO mode 30 dB / normal 34 dB |
| Specials | BrilliantColor™, auto setup, keystone correction, RJ45 via adapter remote control with batteries, owners manual, RGB- and power cable, softcase ceiling mount, spare lamp, RJ45 control adapter, camera c001 |
| Accessories | |
| Options | |
| Menu guidance | 21 languages: English, French, German, Italian, Spanish, Portuguese, Russian, Swedish, Turkish, Polish, Danish, Czech, Hungarian, Dutch, Finnish, Norwegian, Romanian, Indonesian, Greek, Chinese (simple/traditional) |

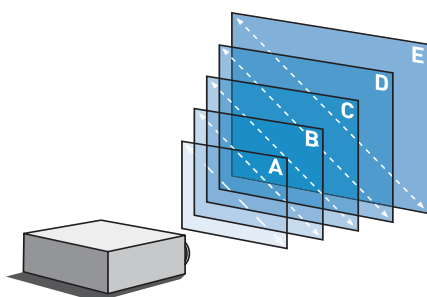

| Picture size | Projection distance |
|--------------|---------------------|
| A 0.76 m | 1.15 - 1.28 m |
| B 1.52 m | 2.37 - 2.62 m |
| C 2.54 m | 3.98 - 4.41 m |
| D 5.08 m | 7.97 - 8.82 m |
| E 7.62 m | 11.88 m |

TOSHIBA
Leading Innovation >>>

www.toshiba-projectors.com

Toshiba Europe GmbH
Projection & Display Technology
Phone: ++49-2131-158-01 · Fax: ++49-2131-158-835
e-mail: projektoreninfo@toshiba-teg.com