


Key Features

- 3rd generation laser phosphor technology with a lifespan of up to 30,000 hours
- 4,000 ANSI Lumens and 1080p resolution for clear images in any environment
- High native contrast ratio powered by a 0.65" DMD chip and DLP technology
- Up to a 300" ultra-large screen with a lower cost-per-inch
- Installation flexibility: 1.3x optical zoom, H/V keystone, and 360° projection



Product Description

The LS401HD is part of ViewSonic's Luminous Superior Series, a lamp-free projector lineup designed for commercial and educational environments. It delivers ultra-large projections up to 300" in sharp 1080p Full HD resolution, leveraging high native contrast from a 0.65" DMD chip with DLP technology. Powered by 3rd-generation laser phosphor technology, it offers 4,000 ANSI Lumens brightness and a remarkable lifespan of up to 30,000 hours. Its lamp-free design ensures eco-friendliness and cost-efficiency by reducing power consumption. With features like a 1.3x optical zoom, H/V keystone correction, and 360° projection, the LS401HD supports flexible installation. Centralized LAN control simplifies management, making it an excellent choice for boardrooms, lecture halls, and public spaces.

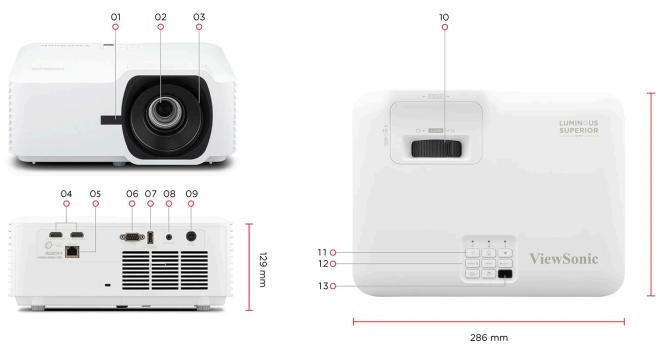

1. Front IR	8. Audio Out
2. Lens	9. DC In
3. Focus Ring	10. Zoom Ring
4. HDMI 2.0 / HDCP 2.2 x2	11. Power Button
5. RJ45	12. Keypad
6. RS232	13. Top IR
7. USB-A (5V/1.5A, Service)	



Visit Us

www.viewsonic.com

SPECIFICATION		OTHERS	
Projection System:	0.65" 1080P	Power Supply Voltage:	Power adaptor: Input: 100~240V Output: 19.5VDC / 9.23A
Native Resolution:	1920x1080	Power Consumption:	Normal: 143W Standby: <0.5W
Brightness:	4000 (ANSI Lumens)	Operating Temperature:	0~40°C
Brightness (Center Lumens):	4400	Carton:	Brown
Contrast Ratio:	3000000:1	Net Weight:	3.00kg
Display Color:	1.07 Billion Colors	Gross Weight:	4.50kg
Light Source Type:	Laser Phosphor	Dimensions (WxDxH) with Adjustment Foot:	286x216x129mm
Light Source Life (hours) with Normal Mode:	20000	Packing Dimensions:	400x280x155mm
Light Source Life (hours) with SuperEco Mode:	30000 (Eco)	OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, Hindi, Arabic, Vietnamese, Greek, Hungarian. Total 24 languages
Lens:	F=2.43-2.78, f=16.90-21.61mm	User Guide Language:	English, S-Chinese, T-Chinese, Indonesian, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai, Vietnamese, total 20 languages
Projection Offset:	132%+/-10%		
Throw Ratio:	1.13-1.47		
Optical Zoom:	1.3X		
Digital Zoom:	0.8x-2.0x		
Image Size:	30"-300"		
Throw Distance:	0.75-9.76m (100"@2.50m)		
Keystone:	H: +/-30° , V: +/-30°		
Audible Noise (Normal):	32dB		
Audible Noise (Eco):	27dB		
Input Lag:	16.7ms		
Resolution Support:	VGA(640 x 480) to 4K UHD(3840 x 2160)		
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160p		
Horizontal Frequency:	15K-135KHz		
Vertical Scan Rate:	24-120Hz		
INPUT		STANDARD ACCESSORY	
HDMI:	2 (HDMI 2.0, HDCP 2.2)	Power Cord:	1
OUTPUT		Remote Control:	1
Audio-out (3.5mm):	1	QSG:	Yes
Speaker:	15W	Warranty Card:	Yes (CN Only)
USB Type A (Power):	1 (5V/ 1.5A)	Wall/Ceiling Mount:	PJ-WMK-007
CONTROL		Carry Bag:	PJ-CASE-008
RS232 (DB 9-pin male):	1		
RJ45 (LAN control):	1		
USB Type A (Services):	1 (share with USB A Output)		